



The Choice of Professionals



King Bros. Industries

29101 The Old Road, Valencia, CA 91355
 Toll Free: (800) 325-9468 Fax: (661) 257-4320
 E-mail: valves@kbico.com Web: www.kbico.com

PVC Schedule 80 Gate Valves

Features:

- Polypropylene wedge for smooth sealing and longer service. (EPDM O'ring).
- Meets/Exceeds ASTM schedule 80 socket and material standards.
- Strong non-rising stem construction.
- Made with Hi-Impact PVC Type II Cell Class 15344-C.
- Molded in the **USA** by KBI.
- 235 psi working pressure (tested to 500 psi static @ 72°F).
- NSF listed.

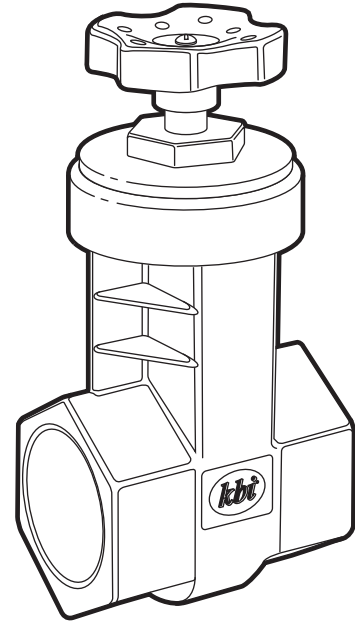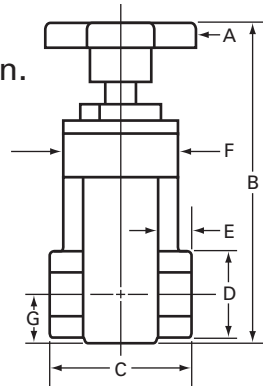

Models		Size	Dimensions							Case	Weight
Socket	Thread		A	B	C	D	E	F	G		
GVG-0500-S	GVG-0500-T	1/2"	2 ¹⁹ / ₆₄ "	4 ⁵³ / ₆₄ "	2 ³ / ₁₆ "	1 ²¹ / ₆₄ "	1/2"	1 ²³ / ₃₂ "	3/4"	24	8.5
GVG-0750-S	GVG-0750-T	3/4"	2 ¹⁹ / ₆₄ "	5 ¹ / ₃₂ "	2 ⁹ / ₃₂ "	1 ⁷ / ₈ "	9/16"	1 ²³ / ₃₂ "	15/16"	20	8.4
GVG-1000-S	GVG-1000-T	1"	2 ¹⁹ / ₆₄ "	5 ⁷ / ₁₆ "	2 ⁵³ / ₆₄ "	1 ⁵⁷ / ₆₄ "	53/64"	1 ⁵³ / ₆₄ "	1 ¹ / ₃₂ "	16	8.2
GVG-1250-S	GVG-1250-T	1 1/4"	2 ²⁵ / ₃₂ "	7 ³ / ₄ "	3 ¹ / ₁₆ "	2 ³⁷ / ₆₄ "	13/16"	2 ¹³ / ₁₆ "	1 ¹ / ₂ "	8	8.3
GVG-1500-S	GVG-1500-T	1 1/2"	2 ²⁵ / ₃₂ "	7 ²⁹ / ₃₂ "	3 ¹ / ₁₆ "	2 ³⁹ / ₆₄ "	13/16"	2 ¹³ / ₁₆ "	1 ³³ / ₆₄ "	6	6.5
GVG-2000-S	GVG-2000-T	2"	3 ⁵ / ₁₆ "	9"	4 ³ / ₁₆ "	3 ¹ / ₂ "	1 ³ / ₈ "	3 ⁵ / ₁₆ "	1 ³ / ₄ "	4	7.4

FEATURES COMMON TO KBI PVC PRODUCTS

- NSF listed *
 - Molded in the USA by KBI
 - Limited LIFETIME Warranty
 - 235 psi working pressure (tested to 500 psi static @ 72°F)
 - Meets/Exceeds ASTM Standards
 - Made with Hi-Impact PVC Type II Cell Class 15344-C
- * See individual products for details

